



C 300H
C 300H x4
C 350H
C 350H x4



www.ausa.com

AUSA - Automóviles Utilitarios, S.A. ● Ctra. de Vic, Km 2.8 - P.O.B. 194, 08243 Manresa - BARCELONA (ESPAÑA) Tel.: +34 93 874 73 11 E-mail: ausa@ausa.com



ISO 9001

ISO 14001



(Sede central AUSA-Manresa)

AUSA MADRID ● Pol. Ind. Coslada-Marconi 15-17, 28820 Coslada - MADRID (ESPAÑA) Tel.: +34 91 669 00 06 E-mail: ausa.madrid@ausa.com

AUSA FRANCE ● Z. I. Saint Charles-Rue de Zürich, 66000 PERPIGNAN (FRANCE) Tel.: +33 (0) 4 68 54 38 97 E-mail: ausa.france@ausa.com

AUSA UK ● UNITS 6 & 7 Alma Industrial Estate, Regent Street - ROCHDALE OL12 0HQ (U.K.) Tel.: +44 (0) 1706 64 96 91 E-mail: ausa.uk@ausa.com

AUSA DEUTSCHLAND GmbH. ● Heinrich - Welken Straße 5, 59069 HAMM - RHYERN (GERMANY) Tel.: +49 2385922245 E-mail: ausa.deutschland@ausa.com

AUSA CORPORATION ● 2655 Le Jeune Road - Suite 916, CORAL GABLES FL 33134 (USA) Toll free: 1 800 820 AUSA E-mail: ausa.corp@ausa.com


BEIJING REPRESENTATIVE OFFICE ● Room B0605 Hongyuan Apartment - N° 4 JIU XIAN QIAO RD., BEIJING 100015 Tel.: +86 10 6432 2578

C 300H_3000 Kg

C 350H_3500 Kg



DIMENSIONS (mm)	C 300 H	C 300 H x4	C 350 H	C 350 Hx4
A	2200	2200	2300	2300
B	300	300	300	300
C	-	-	-	-
D	-	-	-	-
E (narrow axle)	1510	1510	1690	1690
F (wide axle)	1870	1870	1950	1950
G	3490	4500	3490	4500
H	-	-	-	-
I	-	-	-	-
J	50	50	50	50
K	750	750	750	750
L	4500	4500	4500	4500
M	600	600	600	600
N	1950	1950	1950	1950
O	1200	1200	1200	1200
P	-	-	-	-

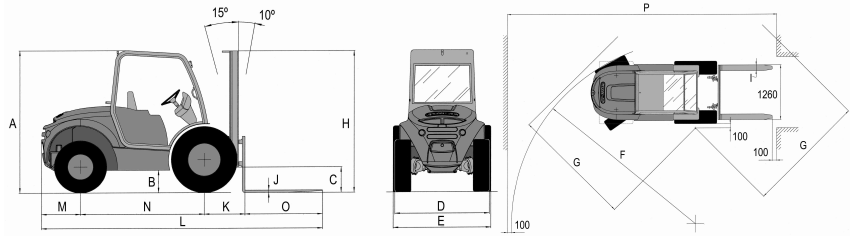

Type of mast	Maximum lifting height (mm)	Front axle	Free lift (mm)	H Machine height with mast retracted (mm)				Machine height with mast extended (mm)				Load (Kg) at max. height			
				C 300 H	C 350 H	C300Hx4	C350Hx4	C 300H	C350H	C300Hx4	C350Hx4	C 300H	C350H	C300Hx4	C350Hx4
Duplex (Std.)	3360	Narrow /Wide (op.)	120	2440	2480	2440	2480	4500	4500	4500	4500	3000	3500	3000	3500
Duplex	4000	Narrow /Wide (op.)	120	2790	2830	2790	2830	5200	5200	5200	5200	-	-	-	-
Triplex (free lift)	3700	Narrow /Wide (op.)	1200	2090	2130	2090	2130	4900	4900	4900	4900	-	-	-	-
Triplex (free lift)	5400	Wide	1680	2657	2698	2657	2698	6600	6600	6600	6600	-	-	-	-
Triplex (free lift)	6780	Wide	2280	-	3200	-	3200	-	6870	-	6870	-	-	-	-

TECHNICAL SPECIFICATIONS

	C 300H	C 300H x4	C 350H	C 350H x4
Load capacity (Centre of gravity at 500 mm) (Kg)	3000		3500	
Lifting height (Standard duplex mast) (mm)	3360		3500	
Engine	Diesel (C 150/200 H) / Turbo diesel (C 250 H)	KUBOTA V 2003-T	KUBOTA V 3300	KUBOTA V 3300
Power acc./DIN 6270 B (KW/HP)	41,87 / 56 (2800 rpm)	44.6/59.9 (2400 rpm)	44.6/59.9 (2400 rpm)	44.6/59.9 (2400 rpm)
Power acc./DIN 70020 (KW/HP)	45,4 / 61 (2800 rpm)	48.1/ 64.5 (2400 rpm)	48.1/ 64.5 (2400 rpm)	48.1/ 64.5 (2400 rpm)
N° of cylinders	4			
Cooling system	Water			
Traction	2	4	2	4
Transmission	Hydrostatic with variable flow pump and automatic regulation Electric gear inverter Inching pedal			
Unladen weight (Kg) (with full tanks)	4800	5000	5400	5600
Gradient negotiable (with full load)	35%	40%	35%	40%
Speed (Maximum) (Km/h)	20			
Engine starting system	Electric			
Tyres	Front	12,5 R 18	12,5 R 18	14,5 R 20
	Rear	7,00 x 12	10,0/75-15,3	7,00 x 12
				10,0/75-15,3
Steering	Hydraulic. Working pressure 160 bar.			
External turning circle (mm)	3000	4500	3000	4500
Tank capacity (l)	Fuel	85		
	Hydraulic fluid	70		
Service brake	Oil-immersed, multidisc, hydraulically driven.			
Parking brake	Oil-immersed, multidisc, spring applied and hydraulically released.			
Hydraulic circuit	2 gear pump of 24 and 8 cc. Working pressure 200 bar	18-8 cc. double gear pump. Working pressure 220 bar	30-8 cc. double gear pump. Working pressure 220 bar..	
Operating pressures for accessories	220			

STANDARD EQUIPMENT

<ul style="list-style-type: none"> Open cabin Ergonomic seat Seat belt Joystick Rotating beacon Side-shift Audible reverse warning

OPTIONAL EQUIPMENT

<ul style="list-style-type: none"> Semi-closed cabin Full cabin with heater Front and rear lights Wide front axle Catalytic converter Spark arrestor Fuel oil filter with water separator 600, 800 and 1000 litre hydraulic buckets
