



叉车

C 400H
C 400H x4
C 500H
C 500H x4



www.ausa.com

AUSA Center, S.L.U. ● Ctra. de Vic, Km 2.8 - P.O.B. 194, 08243 Manresa - BARCELONA (ESPAÑA) Tel.: +34 93 874 73 11 E-mail: ausa@ausa.com



(Sede central AUSA-Manresa)

AUSA Madrid ● Pol. Ind. Coslada-Marconi 15-17, 28820 Coslada - MADRID (ESPAÑA) Tel.: +34 91 669 00 06 E-mail: ausa.madrid@ausa.com

AUSA France ● Z. I. Saint Charles-Rue de Zürich, 66000 PERPIGNAN (FRANCE) Tel.: +33 (0) 4 68 54 38 97 E-mail: ausa.france@ausa.com

AUSA ● Unit 16 Hollows Works - Shawclough Road - Rochdale - Lancs OL12 6LN (U.K.) Tel.: +44 (0) 1706 64 96 91 E-mail: ausa.uk@ausa.com

AUSA Repräsentanzbüro Deutschland ● Heinrich - Welken Str. 5, 59069 HAMM - RHYERN (GERMANY) Tel.: +49 2385922245 E-mail: ausa.deutschland@ausa.com


AUSA CORPORATION ● 2655 Le Jeune Road - Suite 808, CORAL GABLES FL 33134 (USA) Toll free: 1 800 820 AUSA E-mail: ausa.corp@ausa.com

BEIJING Rep. Office ● Address Room 527, HengXiang Building, Tuanjihu Nanli, Chaoyang District. - Beijing 100026 CHINA
Tel: 86-10-8597 1983 - Fax: 86-10-8597 1993 - E-mail: ausa.china@ausa.com

C 400H_4000 Kg
C 500H_5000 Kg



DIMENSIONS (mm)	C 400 H	C 400 H x4	C 500 H	C 500 Hx4
A	2335	2335	2335	2335
B	280	280	280	280
C	300	300	300	300
D	1640	1700	1640	1700
E	2000	2000	2000	2000
F	3560	4770	3560	4770
G	3050	-	3050	-
I	120	120	130	130
J	50	50	60	60
K	718	718	728	728
L	4568	4568	4623	4623
M	660	600	705	645
N	1990	2050	1990	2050
O	1200	1200	1200	1200
P	5680	-	5680	-

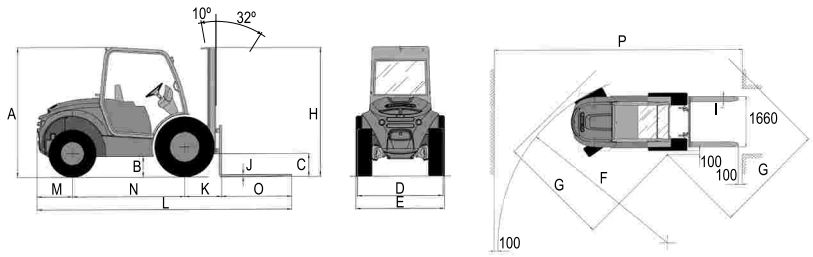

Type of mast	Maximum lifting height (mm)	Free lift (mm)
Duplex (Std.)	3700	100
Duplex	4500	100
Triplex (free lift)	4250	1393
Triplex (free lift)	6800	2243
Triplex (free lift)	8000	2843

H Machine height with mast retracted (mm)				Machine height with mast extended (mm)				Load (Kg) at max. height			
C 400 H	C 500 H	C400Hx4	C500Hx4	C 400H	C500H	C400Hx4	C500Hx4	C 400H	C500H	C400Hx4	C500Hx4
2750	2750	2750	2750	4585	4585	4585	4585	4000	5000	4000	5000
3150	3150	3150	3150	5385	5385	5385	5385	-	-	-	-
2350	2350	2350	2350	5262	5262	5262	5262	-	-	-	-
3200	3200	3200	3200	7812	7812	7812	7812	-	-	-	-
3800	3800	3800	3800	9612	9612	9612	9612	-	-	-	-

TECHNICAL SPECIFICATIONS

	C 400H	C 400H x4	C 500H	C 500H x4
Load capacity (Kg)	4000		5000	
Centre of gravity (mm)	500		600	
Lifting height (Standard duplex mast) (mm)	3700		600	
Engine	Turbodiesel			
	KUBOTA V3300T			
Power acc./DIN 6270 B (KW/HP)	63 / 86 (2600 rpm)			
Power acc./DIN 70020 (KW/HP)	69 / 93 (2600 rpm)			
N° of cylinders	4			
Cubic capacity (cc)	3300			
Cooling system	Water			
Traction	2	4	2	4
Transmission	Hydrostatic with variable flow pump and automatic regulation Electric gear inverter Inching pedal			
Unladen weight (Kg) (with full tanks)	6700	6800	7500	7600
Gradient negotiable (with full load)	35%		30%	
Speed (Maximum) (Km/h)	20			
Engine starting system	Electric			
Tyres	Front	18 R 19,5	18 R 19,5	18 R 19,5
	Rear	8.15 - 15	10.0 / 75 - 15.3	10.0 / 75 - 15.3
Steering	Hydraulic. Working pressure 150 bar	Hydraulic. Working pressure 170 bar	Hydraulic. Working pressure 150 bar	Hydraulic. Working pressure 170 bar
External turning circle (mm)	3560	4770	3560	4770
Tank capacity (l)	Fuel	120		95
	Hydraulic fluid	120		95
Service brake	Oil-immersed, multidisc, hydraulically driven			
Parking brake	Oil-immersed, multidisc, hydraulically driven			
Hydraulic circuit	30 - 10.6 cc. double gear pump			
Operating pressures for accessories (bar)	220 +5		230 +5	

STANDARD EQUIPMENT

- Open cabin
- Ergonomic seat
- Seat belt
- Joystick
- Rotating beacon
- Side-shift
- Audible reverse warning

OPTIONAL EQUIPMENT

- Semi-closed cabin
- Full cabin with heater
- Front and rear lights
- 4th hydraulic valve for accessories
- Catalytic converter
- Spark arrestor
- 800, 1000 and 1500 litre hydraulic buckets
- Load Guard
- Radio